



We Deliver the Power™

LEX LSC 6 Circuit Multi-Cable Tester Operating Instructions



CAUTION: The Lex LSC 6 Circuit Live Multi-Cable Tester is a testing tool designed for the entertainment industry only and must be used by qualified personnel. It is a diagnostic tool to be used for troubleshooting purposes only. The use of a multi-meter is recommended for voltage-sensitive testing. The Lex 6 Circuit Live Multi-Cable Tester will not verify mechanical wire bonding methods.




Quick Safety Test

- Step 1:** Plug the tester into the cable being diagnosed.
- Step 2:** Power up all 6 circuits. If dimmed, bring them to full.
- Step 3:** LEDs should illuminate, indicating the presence of power. Ideally, the Green LEDs for L - N and L - G will be illuminated on all six circuits, indicating the presence of voltage between the line and neutral pins and line voltage between live and ground. Verify that the N - G indicator is NOT illuminated. If N-G IS illuminated this indicates a fault, specifically the presence of line voltage between neutral and ground pins.

-If faults are detected, the Individual Circuit Test can be useful in determining the nature of the fault.

NOTE: If N - G is illuminated, this may cause a neutral error on equipment being energized. Possible causes for faults may be miswired connector(s) or shorted cable conductors.

It is possible for N - G and another indicator to be illuminated, which would help to determine the fault location.

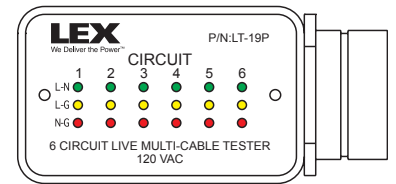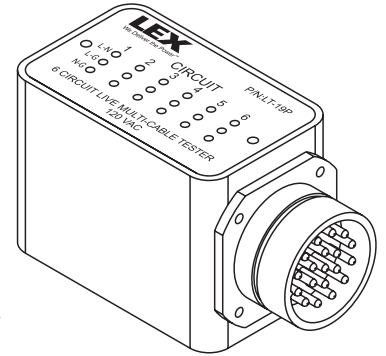

Individual Circuit Test

- Step 1:** Plug the tester into the cable being diagnosed.
- Step 2:** Power up circuit 1. If dimmed, bring it to full.
- Step 3:** Verify that the green LEDs for circuit 1 L-N are illuminated. This indicates the presence of line voltage between live & neutral on circuit #1 and line voltage between live & ground on circuit #1. Also verify that the N - G indicator is NOT illuminated. This would indicate the presence of line potential voltage between neutral & ground on circuit #1.
- Step 4:** Deactivate circuit #1 and power up circuit #2.
- Step 5:** Repeat step 3 as above, viewing column #2 indicators.
- Step 6:** Repeat step 4 for each of the remaining circuits.

Lex Products Corporation
401 Shippan Avenue
Stamford, CT 06902
203.363.3738
203.363.3742 Fax

Lex West
11847 Sheldon Street
Sun Valley, CA 91352
818.768.4474
818.768.4040 Fax

www.lexproducts.com
info@lexproducts.com
800.643.4460