


## PowerRAMP® Crossover Cable Protector

PowerRAMP®  
Cable Protectors

ISO 9001:2008 Certified

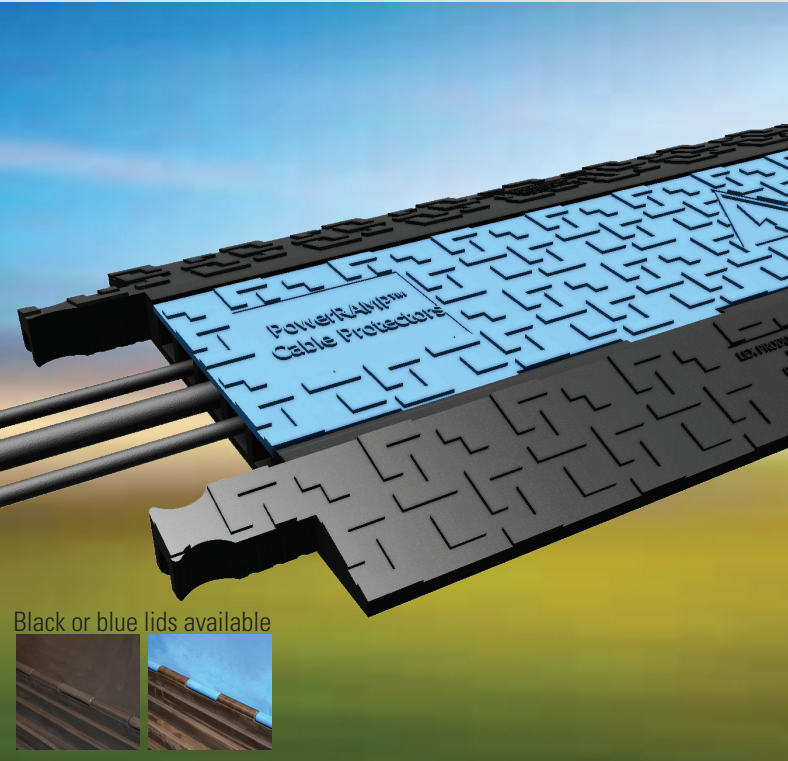

Black or blue lids available

**Catalog Number:**  
PRC-5\*

### Description:

Heavy duty, 5-channel, modular cable protector with hinged lid and rugged industry standard connectors can be easily interconnected to protect cables of any length or mate with 45° left and right turn units and end boots to provide alternate configurations for design flexibility.

### Typical Application:

Protects cables and hoses from damage when run across roads, parking lots, sidewalks and pathways, providing safe crossing for pedestrian and vehicle traffic.

### Markets Served:

Commercial, Industrial, Military and Entertainment. Ideal for indoor and outdoor applications including entertainment venues, sporting events, convention centers, festivals, amusement parks, public events, construction sites, temporary power and disaster relief.



Lex Products Corporation  
15 Progress Drive  
Shelton CT 06484  
203.363.3738  
203.363.3742 Fax

Lex West  
11847 Sheldon Street  
Sun Valley, CA 91352  
818.768.4474  
818.768.4040 Fax

www.lexproducts.com  
info@lexproducts.com  
800.643.4460

© Copyright Lex Products 2013

Produced in the United States of America  
All Rights Reserved.

Lex Products logo and lexproducts.com are trademarks or registered trademarks of Lex Products in the United States, other countries, or both.

### Features & Benefits:

- Heavy duty, non-conductive polyurethane construction provides safe crossing for pedestrians and vehicles while protecting electrical cables and hose lines
- Rugged industry standard connectors with exclusive “slip notch” friction release design provides easy mating and un-mating
- Mates with major cable protector brands and products
- 5-channel design can accommodate up to 1.25 inch diameter cables and hoses
- 1.625 inch wide center channel allows for up to #2 AWG 5-wire banded sets
- Exclusive tread design provides excellent traction
- Hinged lid provides easy access for insertion and removal of cables and hoses
- Made from UV stabilized material for prolonged use in direct sunlight
- High-visibility blue lid and black base
- Company name or logo can be molded into lid for easy identification

### Specifications

<b>Length</b>	35.5 in./901.7 mm
<b>Width</b>	19.75 in./501.65 mm
<b>Height</b>	2 in./51 mm
<b>Weight</b>	27 lbs./12.2 kg
<b>Slot Height</b>	(5) 1.25 in./32 mm Channels
<b>Slot Width</b>	(4) 1.25 in./32 mm Channels (1) 1.625 in./41.3 mm Center Channel
<b>Material</b>	Base/Lid: Polyurethane Hinge Pin: Reinforced Fiberglass
<b>Load Capacity Per Tire/Axle</b>	16,300 lbs. Per Tire/32,600 lbs. Per Axle at 70° F
<b>Safety Warning Symbols</b>	Per ANSI Z535.3-2011-Molded in Lid
<b>Operating Temperature</b>	-40° F to 120° F -40° C to 48° C

\* - Add “-BK” after catalog number for black lid and black base  
Custom colors available. Consult your factory representative for details.