


PowerGATE™ 1200 and 1600 Amp Power Input Panels

LEX
We Deliver the Power™

PowerGATE™
Switches & Panels

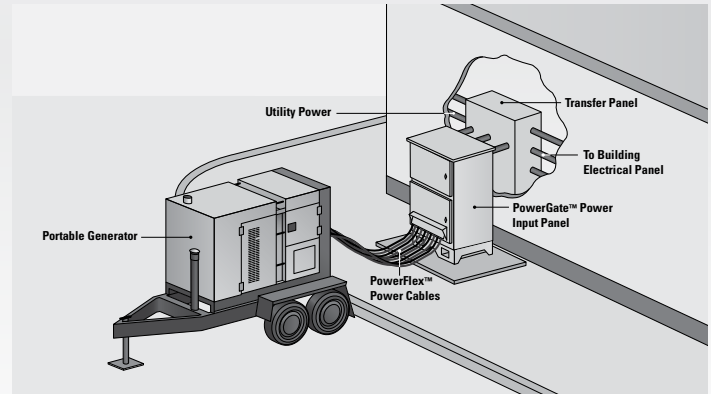

Features & Benefits:

- Entire device is weather resistant and compliant with cETLus safety standards
- Panel can withstand up to a 22,000 Amp short circuit and remain functional; safe to 600 VAC; meets all requirements of NEC Section 702
- Key lock access doors prevent unauthorized access
- Cable egress door restricts access to terminations and provides life-extending mechanical strain relief for the system
- Eliminates need for expensive permanent generator purchase and maintenance and need for professional emergency electrical work
- Outdoor placement eliminates need to run cables in public access areas and allows building entrances to remain securely closed
- Free-standing design eliminates structural stress associated with wall-mounting large panels



Lex Products Corporation
15 Progress Drive
Shelton CT 06484
203.363.3738
203.363.3742 Fax

Lex West
11847 Sheldon Street
Sun Valley, CA 91352
818.768.4474
818.768.4040 Fax

www.lexproducts.com
info@lexproducts.com
800.643.4460

© Copyright Lex Products 2012

Produced in the United States of America
05-30 All Rights Reserved.

Lex Products logo and lexproducts.com are trademarks or registered trademarks of Lex Products in the United States, other countries, or both.

PowerGATE™

1200 and 1600 Amp

Power Input Panels

LEX
We Deliver the Power™



Ordering information

cETLus Listed

	1200 Amp	1600 Amp
Part Number	PGIP1200-CRG15EI-S3	PGIP1600-CRG20EI-S3
Rating	1200 Amp, 3 Phase (H,H,H,N,G), 4 Pole, 5 Wire, 600 VAC Maximum	1600 Amp, 3 Phase (H,H,H,N,G), 4 Pole, 5 Wire, 600 VAC Maximum
Environmental Rating	TYPE 3R Rainproof	TYPE 3R Rainproof
Input	(3) Sets of (5) 16 Series Cam-type color coded panel mount inlets	(4) Sets of (5) 16 Series Cam-type color coded panel mount inlets
Output	Copper Bus Bar with 1/2" Holes	Copper Bus Bar with 1/2" Holes
Enclosure	Powder Coated 12 Gauge Galvanized Steel	Powder Coated 12 Gauge Galvanized Steel
Dimensions	56" H x 30" D x 35" W	56" H x 30" D x 35" W
Approximate Weight	485 lbs	505 lbs

Part Number	PGIP1200-CRG12DI-S3	PGIP1600-CRG16DI-S3
Rating	1200 Amp, 3 Phase (H,H,H,G), 3 Pole, 3 Wire, 600 VAC Maximum	1600 Amp, 3 Phase (H,H,H,G), 3 Pole, 3 Wire, 600 VAC Maximum
Environmental Rating	TYPE 3R Rainproof	TYPE 3R Rainproof
Input	(3) Set of (4) 16 Series Cam-type color coded panel mount inlets	(4) Set of (4) 16 Series Cam-type color coded panel mount inlets
Output	Copper Bus Bar with 1/2" Holes	Copper Bus Bar with 1/2" Holes
Enclosure	Powder Coated 12 Gauge Galvanized Steel	Powder Coated 12 Gauge Galvanized Steel
Dimensions	56" H x 30" D x 35" W	56" H x 30" D x 35" W
Approximate Weight	475 lbs	495 lbs



Lex Products Corporation
15 Progress Drive
Shelton CT 06484
203.363.3738
203.363.3742 Fax

Lex West
11847 Sheldon Street
Sun Valley, CA 91352
818.768.4474
818.768.4040 Fax

www.lexproducts.com
info@lexproducts.com
800.643.4460

© Copyright Lex Products 2012

Produced in the United States of America
05-30 All Rights Reserved.

Lex Products logo and lexproducts.com are trademarks or registered trademarks of Lex Products in the United States, other countries, or both.