



We Deliver the Power™

Lex Products Corporation  
15 Progress Drive  
Shelton, CT 06484  
203.363.3738  
203.363.3742 Fax

Lex West  
11847 Sheldon Street  
Sun Valley, CA 91352  
818.768.4474  
818.768.4040 Fax

www.lexproducts.com  
info@lexproducts.com  
800.643.4460

## LSC19 Cable Extensions

19 Pin, 6-Circuit Multi-Cable Extensions

**PowerFLEX™**  
Cable Assemblies



### Features & Benefits

- *Cables feature proprietary LSC19 6-circuit lighting connectors with 12 interlocking keys to help prevent spinning of the interior within the male and female housing*
- *Prevents misalignment of male and female circuit conductors and unmateable or mismatched connections*
- *Helps prevent broken conductors and loose or damaged ground rings*
- *“Tempered Spring” female contacts maintain constant pin pressure to help ensure low resistance connections*
- *Machined aluminum housing with hard black anodized finish provides maximum durability*
- *Silver plated brass contacts for high conductivity*
- *Specially formulated thermoplastic rubber jacket provides exceptional flexibility and durability*
- *Available in 12, 14 and 16 AWG to meet your specific requirements*
- *14 conductor multi-cable offers two lower weight options when bonded grounds are acceptable*
- *All black construction blends into scenery and is ideal for stage or studio lighting applications*

Rating	Male Connector	Cable	Female Connector	Catalog No.
20 Amp*, 300 VAC Max (6-Circuit)	LSC19-LMC-29	12/18 TPR	LSC19-LFC-29	ME1218-XX-L
20 Amp*, 300 VAC Max (6-Circuit) Ground Conductors Bonded	LSC19-LMC-29	12/14 TPR	LSC19-LFC-29	ME1214-XX-L <sup>†</sup>
15 Amp*, 300 VAC Max (6-Circuit) Ground Conductors Bonded	LSC19-LMC-29	14/14 TPR	LSC19-LFC-29	ME1414-XX-L
5 Amp**, 300 VAC Max (6-Circuit)	LSC19-LMC-29	16/18 TPR	LSC19-LFC-29	ME1618-XX-L

<sup>†</sup>White Extensions Available - add suffix w  
XX to specify cable length. Standard lengths are 5', 10', 15', 25', 50', 75', 100', 125', 150' and 200'.

\*Maximum when used with 50% diversity of load (in accordance with table NEC 520-44)

\*\*5 Amps simultaneously on all circuits

© 2012 Lex Products Corp. All rights reserved.



We Deliver the Power™

Lex Products Corporation  
15 Progress Drive  
Shelton, CT 06484  
203.363.3738  
203.363.3742 Fax


Lex West  
11847 Sheldon Street  
Sun Valley, CA 91352  
818.768.4474  
818.768.4040 Fax

www.lexproducts.com  
info@lexproducts.com  
800.643.4460

## LSC19 Break-Ins and Break-Outs

19 Pin, 6-Circuit Cable Assemblies

**PowerFLEX™**  
Cable Assemblies

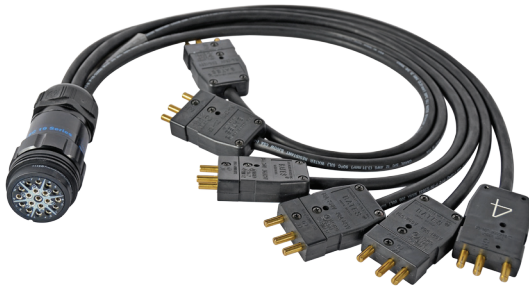

Break-In (6) male 20 Amp stage pins to female LSC19



Break-Out male LSC19 to (6) female 15 Amp NEMA 5-15

### Features & Benefits

- Cables feature proprietary LSC19 6-circuit lighting connectors with 12 interlocking keys to help prevent spinning of the interior within the male and female housing
- Helps eliminate broken conductors and loose or damaged ground rings
- Prevents misalignment of male and female circuit conductors
- Machined aluminum LSC19 housing with hard black anodized finish provides enhanced durability
- Silver plated brass contacts for high conductivity
- Jr. Hard service cord is flexible and compact
- All black construction blends into scenery and is ideal for stage or studio lighting applications
- Available with a variety of NEMA, Edison or stage pin connectors

### Break-Ins

Rating	Male Connector	Cable	Female Connector	Catalog No.
20 Amp*, 125 VAC	(6) 20 Amp Stage Pins	12/3 SJOOW	LSC19-LFC-36	BI100L-3-SP <sup>+</sup>
15 Amp*, 125 VAC	(6) NEMA 5-15 Edison "All Black"	12/3 SJOOW	LSC19-LFC-36	BI100L-3-515 <sup>+</sup>
20 Amp*, 125 VAC	(6) NEMA L5-20 Locking	12/3 SJOOW	LSC19-LFC-36	BI100L-3-L520
20 Amp*, 250 VAC	(6) NEMA L6-20 Locking "All Black"	12/3 SJOOW	LSC19-LFC-36	BI100L-3-L620

### Break-Outs

Rating	Male Connector	Cable	Female Connector	Catalog No.
20 Amp*, 125 VAC	LSC19-LMC-36	12/3 SJOOW	(6) 20 Amp Stage Pins	B0100L-6-SP <sup>+</sup>
15 Amp*, 125 VAC	LSC19-LMC-36	12/3 SJOOW	(6) NEMA 5-15 Edison "All Black"	B0100L-6-515 <sup>+</sup>
20 Amp*, 125 VAC	LSC19-LMC-36	12/3 SJOOW	(6) 20 Amp Stage Pin Staggered	B0100L-STG-SP
15 Amp*, 125 VAC	LSC19-LMC-36	12/3 SJOOW	(6) NEMA 5-15 Edison "All Black" Staggered	B0100L-STG-515
20 Amp*, 125 VAC	LSC19-LMC-36	12/3 SJOOW	(6) NEMA L5-20 Locking "All Black"	B0100L-6-L520
20 Amp*, 250 VAC	LSC19-LMC-36	12/3 SJOOW	(6) NEMA L6-20 Locking "All Black"	B0100L-6-L620

<sup>+</sup>White Assemblies Available - add suffix w  
Custom Lengths available. Contact sales.

\*Maximum when used with 50% diversity of load (in accordance with table NEC 520-44)

© 2012 Lex Products Corp. All rights reserved.