



We Deliver the Power™

Lex Products Corporation
15 Progress Drive
Shelton, CT 06484
203.363.3738
203.363.3742 Fax

Lex West
11847 Sheldon Street
Sun Valley, CA 91352
818.768.4474
818.768.4040 Fax

www.lexproducts.com
info@lexproducts.com
800.643.4460

LSC19 Cable Extensions

19 Pin, 6-Circuit Multi-Cable Extensions

PowerFLEX™
Cable Assemblies



Features & Benefits

- *Cables feature proprietary LSC19 6-circuit lighting connectors with 12 interlocking keys to help prevent spinning of the interior within the male and female housing*
- *Prevents misalignment of male and female circuit conductors and unmateable or mismatched connections*
- *Helps prevent broken conductors and loose or damaged ground rings*
- *“Tempered Spring” female contacts maintain constant pin pressure to help ensure low resistance connections*
- *Machined aluminum housing with hard black anodized finish provides maximum durability*
- *Silver plated brass contacts for high conductivity*
- *Specially formulated thermoplastic rubber jacket provides exceptional flexibility and durability*
- *Available in 12, 14 and 16 AWG to meet your specific requirements*
- *14 conductor multi-cable offers two lower weight options when bonded grounds are acceptable*
- *All black construction blends into scenery and is ideal for stage or studio lighting applications*

| Rating | Male Connector | Cable | Female Connector | Catalog No. |
|--|----------------|-----------|------------------|--------------------------|
| 20 Amp*, 300 VAC Max (6-Circuit) | LSC19-LMC-29 | 12/18 TPR | LSC19-LFC-29 | ME1218-XX-L |
| 20 Amp*, 300 VAC Max (6-Circuit) Ground Conductors Bonded | LSC19-LMC-29 | 12/14 TPR | LSC19-LFC-29 | ME1214-XX-L [†] |
| 15 Amp*, 300 VAC Max (6-Circuit) Ground Conductors Bonded | LSC19-LMC-29 | 14/14 TPR | LSC19-LFC-29 | ME1414-XX-L |
| 5 Amp**, 300 VAC Max (6-Circuit) | LSC19-LMC-29 | 16/18 TPR | LSC19-LFC-29 | ME1618-XX-L |

[†]White Extensions Available - add suffix w
XX to specify cable length. Standard lengths are 5', 10', 15', 25', 50', 75', 100', 125', 150' and 200'.

*Maximum when used with 50% diversity of load (in accordance with table NEC 520-44)

**5 Amps simultaneously on all circuits

© 2012 Lex Products Corp. All rights reserved.



We Deliver the Power™


Lex Products Corporation
15 Progress Drive
Shelton, CT 06484
203.363.3738
203.363.3742 Fax

Lex West
11847 Sheldon Street
Sun Valley, CA 91352
818.768.4474
818.768.4040 Fax

www.lexproducts.com
info@lexproducts.com
800.643.4460

LSC19 Break-Ins and Break-Outs

19 Pin, 6-Circuit Cable Assemblies

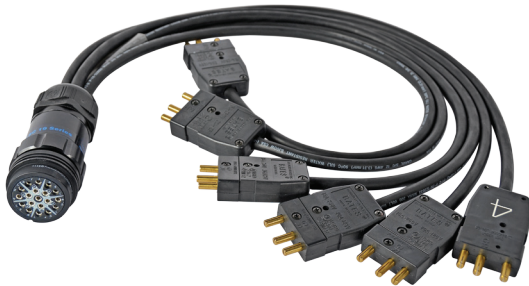

Break-In (6) male 20 Amp stage pins to female LSC19



Break-Out male LSC19 to (6) female 15 Amp NEMA 5-15

Features & Benefits

- *Cables feature proprietary LSC19 6-circuit lighting connectors with 12 interlocking keys to help prevent spinning of the interior within the male and female housing*
- *Helps eliminate broken conductors and loose or damaged ground rings*
- *Prevents misalignment of male and female circuit conductors*
- *Machined aluminum LSC19 housing with hard black anodized finish provides enhanced durability*
- *Silver plated brass contacts for high conductivity*
- *Jr. Hard service cord is flexible and compact*
- *All black construction blends into scenery and is ideal for stage or studio lighting applications*
- *Available with a variety of NEMA, Edison or stage pin connectors*

Break-Ins

| Rating | Male Connector | Cable | Female Connector | Catalog No. |
|------------------|------------------------------------|------------|------------------|---------------------------|
| 20 Amp*, 125 VAC | (6) 20 Amp Stage Pins | 12/3 SJOOW | LSC19-LFC-36 | BI100L-3-SP ⁺ |
| 15 Amp*, 125 VAC | (6) NEMA 5-15 Edison "All Black" | 12/3 SJOOW | LSC19-LFC-36 | BI100L-3-515 ⁺ |
| 20 Amp*, 125 VAC | (6) NEMA L5-20 Locking | 12/3 SJOOW | LSC19-LFC-36 | BI100L-3-L520 |
| 20 Amp*, 250 VAC | (6) NEMA L6-20 Locking "All Black" | 12/3 SJOOW | LSC19-LFC-36 | BI100L-3-L620 |

Break-Outs

| Rating | Male Connector | Cable | Female Connector | Catalog No. |
|------------------|----------------|------------|--|---------------------------|
| 20 Amp*, 125 VAC | LSC19-LMC-36 | 12/3 SJOOW | (6) 20 Amp Stage Pins | B0100L-6-SP ⁺ |
| 15 Amp*, 125 VAC | LSC19-LMC-36 | 12/3 SJOOW | (6) NEMA 5-15 Edison "All Black" | B0100L-6-515 ⁺ |
| 20 Amp*, 125 VAC | LSC19-LMC-36 | 12/3 SJOOW | (6) 20 Amp Stage Pin Staggered | B0100L-STG-SP |
| 15 Amp*, 125 VAC | LSC19-LMC-36 | 12/3 SJOOW | (6) NEMA 5-15 Edison "All Black" Staggered | B0100L-STG-515 |
| 20 Amp*, 125 VAC | LSC19-LMC-36 | 12/3 SJOOW | (6) NEMA L5-20 Locking "All Black" | B0100L-6-L520 |
| 20 Amp*, 250 VAC | LSC19-LMC-36 | 12/3 SJOOW | (6) NEMA L6-20 Locking "All Black" | B0100L-6-L620 |

⁺White Assemblies Available - add suffix w
Custom Lengths available. Contact sales.

*Maximum when used with 50% diversity of load (in accordance with table NEC 520-44)

© 2012 Lex Products Corp. All rights reserved.