



We Deliver the Power™

Lex Products Corporation
15 Progress Drive
Shelton, CT 06484
203.363.3738
203.363.3742 Fax



Lex West
11847 Sheldon Street
Sun Valley, CA 91352
818.768.4474
818.768.4040 Fax

www.lexproducts.com
info@lexproducts.com
800.643.4460

Company Switch with IEC 60309 Pin & Sleeve Receptacle

Patented, UL Listed Access for Temporary Power

PowerFLEX™
Cable Assemblies

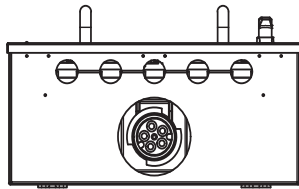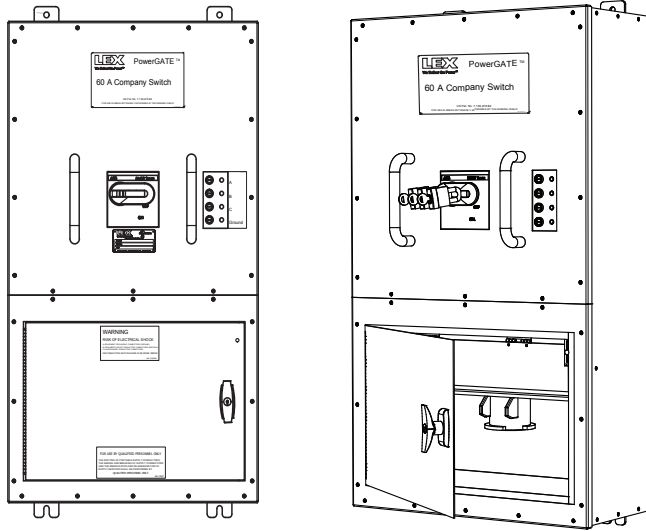

Bottom View



Features & Benefits

- **PowerGATE™ Company Switch design accommodates both pin & sleeve and lug outputs in one wiring chamber, resulting in a compact design**
- **Both pin & sleeve and lug connections are behind lockable access door, helping to eliminate accidental disconnection, unauthorized access and/or tampering with connections**
- **For enhanced safety, the access door to pin & sleeve and lug connections is interlocked to the main breaker, which means the breaker cannot be turned on when the access door is open**
- **Power shuts off automatically when the access door is opened, eliminating the ability to make or break a connection under load**
- **Features an electronic trip circuit breaker that is 100% rated, enabling continuous operation at maximum capacity**
- **Circuit breaker rated at 65,000 AIC (Amps Interrupting Capacity) to exceed requirements for installed dimmers**
- **Circuit breaker allows for lockout/tagout to restrict access as needed**
- **Pin & sleeve and lug terminations positioned to enable both sets of cable to drape downward for lower profile for wall-mounting**
- **Features a durable IEC 60309 pin & sleeve receptacle built to an intertaional configuration standard**
- **IEC 60309 pin & sleeve receptacle does not require qualified personnel for installation**
- **The chassis ground can be isolated from the main ground for sensitive audio applications**

Ordering Information

	100 AMP	60 AMP
Catalog Number	CS-100F-D5PS1	CS-60F-D5PS1
Rating	100 Amp, 3 Phase (H,H,H,N,G), 120/208Y VAC 65,000 AIC Main Breaker 100% Rated	60 Amp, 3 Phase (H,H,H,N,G), 120/208Y VAC 65,000 AIC Main Breaker 100% Rated
Output	(1) 100 Amp, 3 Phase, 4 Pole, 5 Wire, 120/208Y IEC 60309 pin & sleeve receptacle; (5) Lugs for bare wire connection, in parallel with pin & sleeve receptacle	(1) 60 Amp, 3 Phase, 4 Pole, 5 Wire, 120/208Y IEC 60309 pin & sleeve receptacle; (5) Lugs for bare wire connection, in parallel with pin & sleeve receptacle
Cabinet Finish Color	Beige or matte black powder coat	Beige or matte black powder coat
Dimensions	38.50" H x 20.27" W x 9.33" D	38.50" H x 20.27" W x 9.33" D

For black finish, add suffix "-BLK" to catalog number.